

Proseal Nano

NATURAL EFFECT IMPREGNATOR SEALER

Stain resistant sealer with a natural effect. Its high penetration capacity and weather resistance make it ideal for extreme and long-lasting surface protection.



Untreated



Treated



 **EXTREME LONG-LASTING PROTECTION**

 **PENETRATES DEEPLY**

 **ANTIGRAFFITI**

Technical data:

- ◆ **Density at 25°C gr/cm3:** 0.900
- ◆ **Standard colour:** colourless
- ◆ **Appearance:** opalescent liquid

Indicative duration:

- ◆ **Indoor:**
12-24 months
- ◆ **Outdoor:**
6-12 months

The stated consumption is merely indicative



Solvent based



Indoor
Outdoor

Tools:

- ◆ Brush
- ◆ Cloth
- ◆ Sponge
- ◆ Fleece



Natural stone



Quartz

How to apply it:

- ◆ Apply the product to a dry, clean surface.
- ◆ Apply the product evenly.
- ◆ Do not expose to sunlight during application.
- ◆ If applied improperly, a sticky film will form.
- ◆ After a few minutes, wipe off excess product with a clean cloth.
- ◆ Do not step on the treated surface for 4-6 hours.
- ◆ After 24 hours, the treatment will be absorbed by the material, achieving the desired protection.

Indicative consumption 1 l:

Consumption depends on the porosity of the material - yield per coat

Lava stone and marble 30-40m²

Quartz 20-30m²

Safety measures:

Read the instructions in the technical and safety data sheet and the notes on the packaging before use. Close the container after use. For professional use only.

Warnings:

When a surface is treated for the first time, it is advisable to evaluate the effect or adhesion on a sample or hidden corner.



Opening the can



Dampen the cloth




Product application



Excess removal



Protective effect

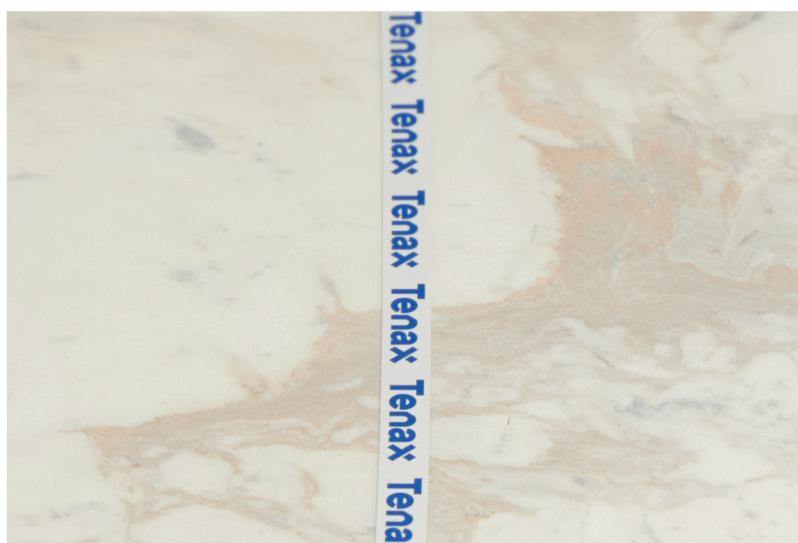

Final result