

Polytenax Wet

SOLID POLYEPOXY GLUE

Solid coloured glue with high performance in terms of bonding strength and speed. Soft and easy to spread, it is ideal for bonding and lamination even on wet surfaces.



STRONG AND FAST BONDING



BONDING ALSO ON WET SURFACES



IDEAL FOR LAMINATIONS

Technical data:

- ◆ **Density at 25°C gr/cm³:** 1.53
- ◆ **Standard colour:** coloured
- ◆ **Appearance:** coloured paste

Approximate consumption:

- ◆ **For grouting:**
20-30 linear meters
- ◆ **For bonding:**
30-40 mt2

The stated duration is only approximate



Indoor



Natural stone



Quartz



Ceramic

How to apply it:

- ◆ Remove the desired quantity of product from the container and weigh it.
- ◆ Comply with the ratio between the product and its hardener as indicated in the TDS.
- ◆ Use clean tools when mixing.
- ◆ If necessary, add liquid or pigment dyes before mixing with the hardener.
- ◆ Make sure that the material on which the product will be applied is clean and dry.
- ◆ To clean tools soiled with mastics, use non-greasy solvents, e.g. Acetone or Butyl Acetate. Use the necessary PPE.
- ◆ Read the technical and safety data sheet carefully.
- ◆ Close the containers with their original caps for correct storage.
- ◆ Avoid prolonged contact with air.

Performance:


Adhesion strength [Mpa]	ceramic 10
Gel time in mass at 25°C	4-5 min
Workability time at 25°C	25-30 min
Extraclear	no
Stability to sunlight	good
Wet effect	excellent
Spreadability	good
Adhesion on wet	yes

Safety measures:

Before use, please read the instructions in the safety data sheet and the notes on the packaging. Close the container after use. For professional use only.

Warnings:

When a surface is treated for the first time, it is advisable to evaluate its effect or adhesion on a sample or hidden corner.

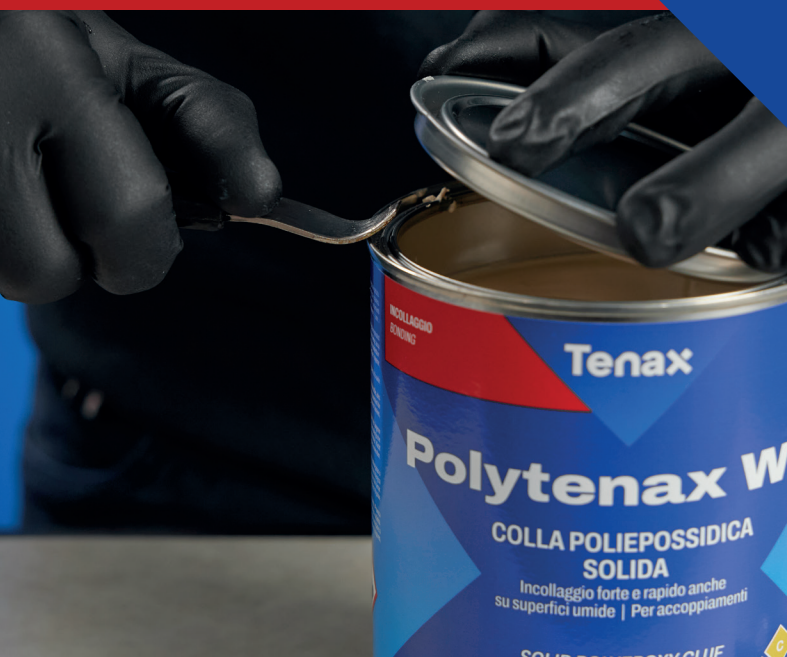

Opening the jar




Spatula product



Addition of hardener



Post mix verticality

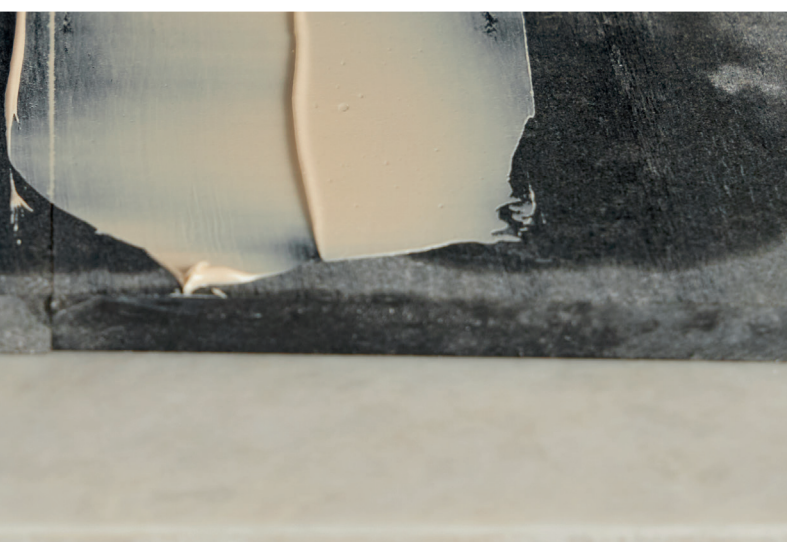

Mixed product appearance



Hardened product appearance